



power contactor, AC-3e/AC-3 225 A, 110 kW / 400 V AC (50-60 Hz) / DC U<sub>c</sub>: 220-240 V 3-pole, auxiliary contacts 2 NO + 2 NC drive: conventional main circuit: busbar control and auxiliary circuit: screw terminal

|  |                              |
|--|------------------------------|
| <b>product brand name</b>  | SIRIUS                       |
| <b>product designation</b>   | Power contactor              |
| <b>product type designation</b>  | 3RT1                         |
| <b>General technical data</b>  |                              |
| <b>size of contactor</b>   | S10                          |
| <b>product extension</b>   |                              |
| • function module for communication  | No                           |
| • auxiliary switch   | Yes                          |
| <b>power loss [W] for rated value of the current</b>   |                              |
| • at AC in hot operating state   | 51 W                         |
| • at AC in hot operating state per pole  | 17 W                         |
| • without load current share typical   | 7.4 W                        |
| <b>type of calculation of power loss current-dependent</b>   | quadratic                    |
| <b>insulation voltage</b>  |                              |
| • of main circuit with degree of pollution 3 rated value   | 1 000 V                      |
| • of auxiliary circuit with degree of pollution 3 rated value  | 500 V                        |
| <b>surge voltage resistance</b>  |                              |
| • of main circuit rated value  | 8 kV                         |
| • of auxiliary circuit rated value   | 6 kV                         |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V                        |
| <b>shock resistance at rectangular impulse</b>   |                              |
| • at AC  | 8,5 g / 5 ms, 4,2 g / 10 ms  |
| • at DC  | 8,5 g / 5 ms, 4,2 g / 10 ms  |
| <b>shock resistance with sine pulse</b>  |                              |
| • at AC  | 13,4 g / 5 ms, 6,5 g / 10 ms |
| • at DC  | 13,4 g / 5 ms, 6,5 g / 10 ms |
| <b>mechanical service life (operating cycles)</b>  |                              |
| • of contactor typical   | 10 000 000                   |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                    |
| • of the contactor with added auxiliary switch block typical   | 10 000 000                   |
| <b>reference code according to IEC 81346-2</b>   | Q                            |
| <b>Substance Prohibitance (day/month/year)</b>   | 05/01/2012                   |
| <b>SVHC substance name</b>   | Lead CAS-No. 7439-92-1       |
| <b>Net Weight</b>  | 6.436 kg                     |

| Ambient conditions   |                     |
|--|---------------------|
| installation altitude at height above sea level maximum                | 2 000 m             |
| <b>ambient temperature</b>   |                     |
| • during operation   | -25 ... +60 °C      |
| • during storage   | -55 ... +80 °C      |
| <b>relative humidity minimum</b>                                       | 10 %                |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>  | 95 %                |
| Main circuit   |                     |
| <b>number of poles for main current circuit</b>                        | 3                   |
| <b>number of NO contacts for main contacts</b>                         | 3                   |
| <b>number of NC contacts for main contacts</b>                         | 0                   |
| <b>operating voltage</b>   |                     |
| • at AC-3 rated value maximum  | 1 000 V             |
| • at AC-3e rated value maximum   | 1 000 V             |
| <b>operational current</b>   |                     |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 275 A               |
| • at AC-1  |                     |
| — up to 690 V at ambient temperature 40 °C rated value                 | 275 A               |
| — up to 690 V at ambient temperature 60 °C rated value                 | 250 A               |
| — up to 1000 V at ambient temperature 40 °C rated value                | 100 A               |
| — up to 1000 V at ambient temperature 60 °C rated value                | 100 A               |
| • at AC-3  |                     |
| — at 400 V rated value   | 225 A               |
| — at 500 V rated value   | 225 A               |
| — at 690 V rated value   | 225 A               |
| — at 1000 V rated value  | 68 A                |
| • at AC-3e   |                     |
| — at 400 V rated value   | 225 A               |
| — at 500 V rated value   | 225 A               |
| — at 690 V rated value   | 225 A               |
| — at 1000 V rated value  | 68 A                |
| • at AC-4 at 400 V rated value   | 195 A               |
| • at AC-5a up to 690 V rated value                                     | 242 A               |
| • at AC-5b up to 400 V rated value                                     | 186 A               |
| • at AC-6a   |                     |
| — up to 230 V for current peak value n=20 rated value                  | 225 A               |
| — up to 400 V for current peak value n=20 rated value                  | 225 A               |
| — up to 500 V for current peak value n=20 rated value                  | 225 A               |
| — up to 690 V for current peak value n=20 rated value                  | 225 A               |
| — up to 1000 V for current peak value n=20 rated value                 | 68 A                |
| • at AC-6a   |                     |
| — up to 230 V for current peak value n=30 rated value                  | 172 A               |
| — up to 400 V for current peak value n=30 rated value                  | 172 A               |
| — up to 500 V for current peak value n=30 rated value                  | 172 A               |
| — up to 690 V for current peak value n=30 rated value                  | 172 A               |
| — up to 1000 V for current peak value n=30 rated value                 | 68 A                |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 150 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                     |
| • at 400 V rated value   | 96 A                |
| • at 690 V rated value   | 85 A                |
| <b>operational current</b>   |                     |
| • at 1 current path at DC-1  |                     |

|  |        |
|--|--------|
| — at 24 V rated value  | 200 A  |
| — at 60 V rated value  | 200 A  |
| — at 110 V rated value   | 18 A   |
| — at 220 V rated value   | 3.4 A  |
| — at 440 V rated value   | 0.8 A  |
| — at 600 V rated value   | 0.5 A  |
| <b>• with 2 current paths in series at DC-1</b>                    |        |
| — at 24 V rated value  | 200 A  |
| — at 60 V rated value  | 200 A  |
| — at 110 V rated value   | 200 A  |
| — at 220 V rated value   | 20 A   |
| — at 440 V rated value   | 3.2 A  |
| — at 600 V rated value   | 1.6 A  |
| <b>• with 3 current paths in series at DC-1</b>                    |        |
| — at 24 V rated value  | 200 A  |
| — at 60 V rated value  | 200 A  |
| — at 110 V rated value   | 200 A  |
| — at 220 V rated value   | 200 A  |
| — at 440 V rated value   | 11 A   |
| — at 600 V rated value   | 4 A    |
| <b>• at 1 current path at DC-3 at DC-5</b>                         |        |
| — at 24 V rated value  | 200 A  |
| — at 60 V rated value  | 7.5 A  |
| — at 220 V rated value   | 0.6 A  |
| — at 440 V rated value   | 0.17 A |
| — at 600 V rated value   | 0.12 A |
| <b>• with 2 current paths in series at DC-3 at DC-5</b>            |        |
| — at 24 V rated value  | 200 A  |
| — at 60 V rated value  | 200 A  |
| — at 110 V rated value   | 200 A  |
| — at 220 V rated value   | 2.5 A  |
| — at 440 V rated value   | 0.65 A |
| — at 600 V rated value   | 0.37 A |
| <b>• with 3 current paths in series at DC-3 at DC-5</b>            |        |
| — at 24 V rated value  | 200 A  |
| — at 60 V rated value  | 200 A  |
| — at 110 V rated value   | 200 A  |
| — at 220 V rated value   | 200 A  |
| — at 440 V rated value   | 1.4 A  |
| — at 600 V rated value   | 0.75 A |
| <b>operating power</b>   |        |
| <b>• at AC-3</b>   |        |
| — at 230 V rated value   | 55 kW  |
| — at 400 V rated value   | 110 kW |
| — at 500 V rated value   | 160 kW |
| — at 690 V rated value   | 200 kW |
| — at 1000 V rated value  | 90 kW  |
| <b>• at AC-3e</b>  |        |
| — at 230 V rated value   | 55 kW  |
| — at 400 V rated value   | 110 kW |
| — at 500 V rated value   | 160 kW |
| — at 690 V rated value   | 200 kW |
| — at 1000 V rated value  | 90 kW  |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> |        |
| <b>• at 400 V rated value</b>                                      | 54 kW  |
| <b>• at 690 V rated value</b>                                      | 82 kW  |
| <b>operating apparent power at AC-6a</b>                           |        |
| <b>• up to 230 V for current peak value n=20 rated value</b>       | 90 kVA |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=20 rated value</li> <li>• up to 500 V for current peak value n=20 rated value</li> <li>• up to 690 V for current peak value n=20 rated value</li> <li>• up to 1000 V for current peak value n=20 rated value</li> </ul>   | 150 kVA<br>190 kVA<br>260 kVA<br>110 kVA  |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> <li>• up to 400 V for current peak value n=30 rated value</li> <li>• up to 500 V for current peak value n=30 rated value</li> <li>• up to 690 V for current peak value n=30 rated value</li> <li>• up to 1000 V for current peak value n=30 rated value</li> </ul>                   | 60 kVA<br>110 kVA<br>140 kVA<br>200 kVA<br>110 kVA  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> <li>• limited to 5 s switching at zero current maximum</li> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 4 000 A; Use minimum cross-section acc. to AC-1 rated value<br>2 807 A; Use minimum cross-section acc. to AC-1 rated value<br>2 082 A; Use minimum cross-section acc. to AC-1 rated value<br>1 397 A; Use minimum cross-section acc. to AC-1 rated value<br>1 144 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>   | 2 000 1/h<br>2 000 1/h  |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— maximum</li> </ul> </li> <li>• at AC-4 maximum</li> </ul>  | 750 1/h<br>250 1/h<br>500 1/h<br>500 1/h<br>130 1/h   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC/DC   |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>  | 220 ... 240 V<br>220 ... 240 V  |
| <b>control supply voltage at DC rated value</b>   | 220 ... 240 V   |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>   | 0.8<br>1.1  |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.8 ... 1.1<br>0.8 ... 1.1  |
| <b>design of the surge suppressor</b>   | with varistor   |
| <b>apparent pick-up power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• at maximum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 60 Hz</li> <li>— at 50 Hz</li> </ul> </li> </ul>  | 490 VA<br>490 VA<br>590 VA<br>590 VA  |
| <b>apparent pick-up power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 590 VA<br>590 VA  |
| <b>inductive power factor with closing power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 0.9<br>0.9  |
| <b>apparent holding power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at DC</li> <li>• at maximum rated control supply voltage at DC</li> </ul>  | 6.1 VA<br>7.4 VA  |
| <b>apparent holding power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at AC</li> </ul>   |   |

|   |   |
|---|---|
| — at 50 Hz  | 5.6 VA  |
| — at 60 Hz  | 5.6 VA  |
| <b>• at maximum rated control supply voltage at AC</b>  |   |
| — at 50 Hz  | 6.7 VA  |
| — at 60 Hz  | 6.7 VA  |
| <b>inductive power factor with the holding power of the coil</b>  |   |
| • at 50 Hz  | 0.9   |
| • at 60 Hz  | 0.9   |
| <b>closing power of magnet coil at DC</b>   | 650 W   |
| <b>holding power of magnet coil at DC</b>   | 7.4 W   |
| <b>closing delay</b>  |   |
| • at AC   | 30 ... 95 ms                                    |
| • at DC   | 30 ... 95 ms                                    |
| <b>opening delay</b>  |   |
| • at AC   | 40 ... 80 ms                                    |
| • at DC   | 40 ... 80 ms                                    |
| <b>arcing time</b>  | 10 ... 15 ms                                    |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2                                |
| <b>Auxiliary circuit</b>  |   |
| number of NC contacts for auxiliary contacts instantaneous contact  | 2   |
| number of NO contacts for auxiliary contacts instantaneous contact  | 2   |
| operational current at AC-12 maximum  | 10 A  |
| <b>operational current at AC-15</b>   |   |
| • at 230 V rated value  | 6 A   |
| • at 400 V rated value  | 3 A   |
| • at 500 V rated value  | 2 A   |
| • at 690 V rated value  | 1 A   |
| <b>operational current at DC-12</b>   |   |
| • at 24 V rated value   | 10 A  |
| • at 48 V rated value   | 6 A   |
| • at 60 V rated value   | 6 A   |
| • at 110 V rated value  | 3 A   |
| • at 125 V rated value  | 2 A   |
| • at 220 V rated value  | 1 A   |
| • at 600 V rated value  | 0.15 A  |
| <b>operational current at DC-13</b>   |   |
| • at 24 V rated value   | 10 A  |
| • at 48 V rated value   | 2 A   |
| • at 60 V rated value   | 2 A   |
| • at 110 V rated value  | 1 A   |
| • at 125 V rated value  | 0.9 A   |
| • at 220 V rated value  | 0.3 A   |
| • at 600 V rated value  | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>UL/CSA ratings</b>   |   |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |   |
| • at 480 V rated value  | 180 A   |
| • at 600 V rated value  | 192 A   |
| <b>yielded mechanical performance [hp]</b>  |   |
| • for 3-phase AC motor  |   |
| — at 200/208 V rated value  | 60 hp   |
| — at 220/230 V rated value  | 75 hp   |
| — at 460/480 V rated value  | 150 hp  |
| — at 575/600 V rated value  | 200 hp  |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600                                     |
| <b>Short-circuit protection</b>   |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA                  |

|   |  |
|---|--|
| <b>design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>● for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> </ul> </li> <br/> <li>● for short-circuit protection of the auxiliary switch required</li> </ul> | gG: 500 A (690 V, 100 kA)<br>gG: 400 A (690 V, 100 kA), aM: 315 A (690 V, 50 kA), BS88: 400 A (415 V, 50 kA)<br>gG: 10 A (500 V, 1 kA) |

### Installation/ mounting/ dimensions

|  |  |
|--|--|
| <b>mounting position</b>   | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method side-by-side mounting   | Yes  |
| <b>fastening method</b>  | screw fixing   |
| <b>height</b>  | 210 mm   |
| <b>width</b>   | 145 mm   |
| <b>depth</b>   | 202 mm   |
| <b>required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>● with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards 20 mm</li> <li>— upwards 10 mm</li> <li>— downwards 10 mm</li> <li>— at the side 0 mm</li> </ul> </li> <br/> <li>● for grounded parts <ul style="list-style-type: none"> <li>— forwards 20 mm</li> <li>— upwards 10 mm</li> <li>— at the side 10 mm</li> <li>— downwards 10 mm</li> </ul> </li> <br/> <li>● for live parts <ul style="list-style-type: none"> <li>— forwards 20 mm</li> <li>— upwards 10 mm</li> <li>— downwards 10 mm</li> <li>— at the side 10 mm</li> </ul> </li> </ul> |  |

### Connections/ Terminals

|   |  |
|---|--|
| <b>type of electrical connection</b>  |  |
| <ul style="list-style-type: none"> <li>● for main current circuit</li> <li>● for auxiliary and control circuit</li> <li>● at contactor for auxiliary contacts</li> <li>● of magnet coil</li> </ul>  | Connection bar<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals |
| <b>width of connection bar</b>  | 25 mm  |
| <b>thickness of connection bar</b>  | 6 mm   |
| <b>diameter of holes</b>  | 11 mm  |
| <b>number of holes</b>  | 1  |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>● for AWG cables for main contacts</li> </ul>  | 2/0 ... 500 kcmil  |
| <b>connectable conductor cross-section for main contacts</b>  |  |
| <ul style="list-style-type: none"> <li>● stranded</li> </ul>  | 70 ... 240 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>● solid or stranded</li> <li>● finely stranded with core end processing</li> </ul>   | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>                               |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>● for auxiliary contacts <ul style="list-style-type: none"> <li>— solid 2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), max. 2x (0.75 ... 4 mm<sup>2</sup>)</li> <li>— solid or stranded 2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), max. 2x (0.75 ... 4 mm<sup>2</sup>)</li> <li>— finely stranded with core end processing 2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</li> </ul> </li> <li>● for AWG cables for auxiliary contacts 2x (20 ... 16), 2x (18 ... 14), 1x 12</li> </ul> |  |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>   | 18 ... 14  |

### Safety related data

|   |                  |
|---|------------------|
| <b>product function</b>   |                  |
| <ul style="list-style-type: none"> <li>● mirror contact according to IEC 60947-4-1</li> <li>● positively driven operation according to IEC 60947-5-1</li> <li>● suitable for safety function</li> </ul> | Yes<br>No<br>Yes |

|  |           |
|--|-----------|
| suitability for use safety-related switching OFF                     | Yes       |
| service life maximum   | 20 a      |
| test wear-related service life necessary                             | Yes       |
| proportion of dangerous failures                                     |           |
| • with low demand rate according to SN 31920                         | 40 %      |
| • with high demand rate according to SN 31920                        | 73 %      |
| <b>B10 value with high demand rate according to SN 31920</b>         | 1 000 000 |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 100 FIT   |

|   |     |
|---|-----|
| ISO 13849   |     |
| device type according to ISO 13849-1                | 3   |
| overdimensioning according to ISO 13849-2 necessary | Yes |

|   |        |
|---|--------|
| IEC 61508                                   |        |
| safety device type according to IEC 61508-2 | Type A |

|   |  |
|---|--|
| Electrical Safety                                       |  |
| protection class IP on the front according to IEC 60529 | IP00; IP20 with box terminal/cover                                       |
| touch protection on the front according to IEC 60529    | finger-safe, for vertical contact from the front with box terminal/cover |

### Approvals Certificates

|  |          |
|--|----------|
| Environmental Product Declaration                          |          |
| • global warming potential [CO2 eq] / during manufacturing | 31.5 kg  |
| • global warming potential [CO2 eq] / during sales         | 2.6 kg   |
| • global warming potential [CO2 eq] / during operation     | 521 kg   |
| • global warming potential [CO2 eq] / after end of life    | -7.22 kg |
| • global warming potential [CO2 eq] / total                | 548 kg   |

|             |                          |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Confirmations](#)



|                          |     |                   |
|--------------------------|-----|-------------------|
| General Product Approval | EMV | Functional Safety |
|--------------------------|-----|-------------------|



[Type Examination Certificate](#)

|                   |                      |       |
|-------------------|----------------------|-------|
| Test Certificates | Maritime application | other |
|-------------------|----------------------|-------|

[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



[Miscellaneous](#)

|       |         |
|-------|---------|
| other | Railway |
|-------|---------|

[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)



[Miscellaneous](#)

[Special Test Certificate](#)

### Further information

- Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-6AP36>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-6AP36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1064-6AP36&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1064-6AP36&lang=en)


Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1064-6AP36>

Characteristic curves

[https://curves.simarisiemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simarisiemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

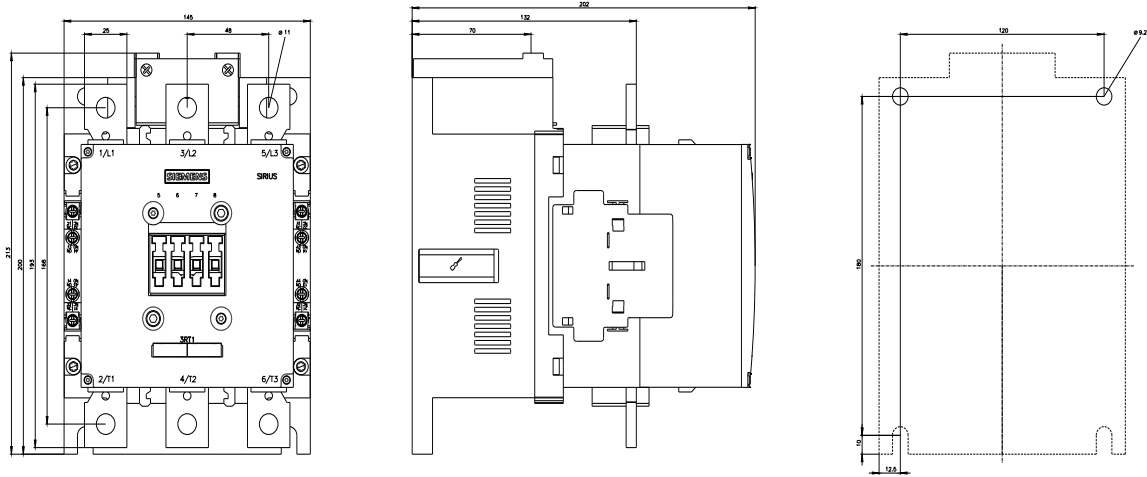

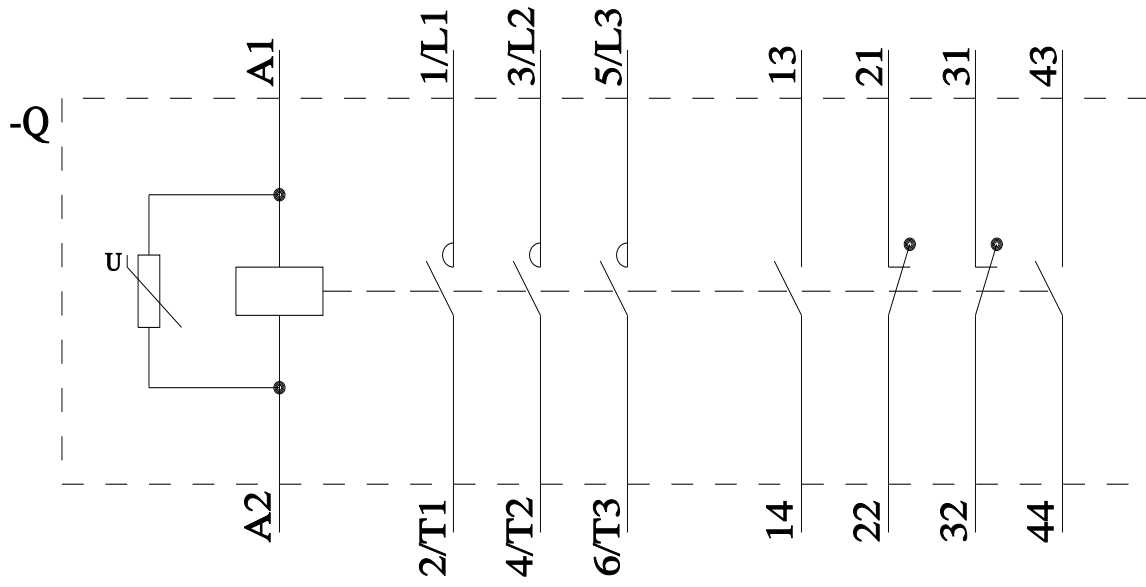

last modified:

4/4/2026 